

**Panasonic**

AQUAREA

# Panasonic Pro-HT DHW System

**TEAGASC February 22<sup>nd</sup> 2022**



heating & cooling solutions

## PRO-HT Tank for Domestic Hot Water (DHW)





PAW-VP750/1000LDHW

## PRO-HT Tank for Cooling/Heating



PAW-VP380L




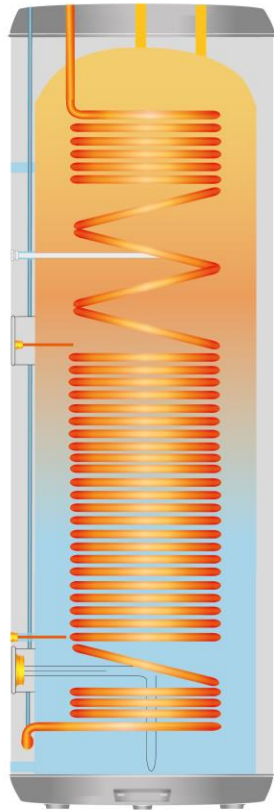

PRO-HT Tanks are water tanks with integrated condensing coil, enabling a direct heat transfer from the refrigerant in the coil to the water in the tank. They are designed for the combination with specific PACi and ECOi outdoor units.


There are 2 types of these tanks:

- for domestic hot water applications
- for heating/cooling applications



PRO-HT Tank\_ Heating & Cooling Type : PAW-VP380L

Panasonic BUSINESS

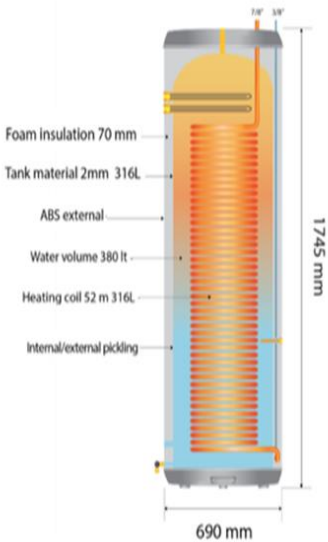

- Water volume 380L
- Foam insulation 70 mm
- Heating coil 52m, 316L
- Internal /external pickling
- Tank material 2mm 316L
- ABS external

**What is pickling?**  
Pickling is a metal surface treatment used to remove impurities, such as stains, inorganic contaminants, rust or scale from ferrous metals, copper, precious metals and aluminium alloys.



heating & cooling solutions

PRO-HT Tank DHW type : PAW-VP1000/750DHW


Panasonic BUSINESS



- Water volume 1000/750L
- Heating coil 63m for 1000L
- Internal /external pickling
- Foam insulation 70 mm for 200L & 500L, 100 mm for the 750L & 1000L
- Tank material 2mm 316L
- ABS external

PIPE-IN-PIPE Heat Exchanger with Nano technology

Conventional Double pipe




New Double pipe  
(used in PAW-VP\*\*\*LDHW)



92% of  
the surface of inlet &  
outlet pipe touching

BEST HEAT  
TRANSFER

PATENT Technology for Heat Exchanger



The connector separates the superheat from the refrigerant condensation process, and transfer it to the outer pipe. This technology produce up to 75 degrees water temperature.



## Michael O'Donovan Dairy Farm Pro-HT Installation, Clonakilty, Cork

- This Panasonic Pro-HT system was installed last year. The unit is designed to water target temperatures of 85 deg C.
- The Dairy parlour is using 120.0000 of Hot Water every 4 months, at a cost of €580 plus vat.
- The cylinder is A rated with 316 stainless steel and a magnesium anode to offer additional protection.



# Panasonic

heating & cooling solutions